

FLOS

60.7661

Constant current power supply 15W, 220-240V - 50/60Hz with programmable output current via DIP switch. 400mA - 11.6W / 450mA - 13W / 500mA - 14.5W / 550mA - 15.9W. Phase-cut dimmable (Triac).



Constant current power supply 15W, 220-240V - 50/60Hz with programmable output current via DIP switch. 400mA - 11.6W / 450mA - 13W / 500mA - 14.5W / 550mA - 15.9W. Phase-cut dimmable (Triac).

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Power (W) 15.9

Physical

IP internal 20

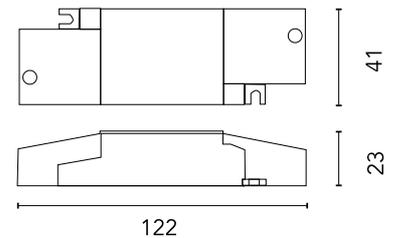

Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	230
LED current (mA)	400 - 550
Power supply	Remote
Power supply type	Mains Cut Dimming
Dimming interface	Remote Dimmable (Dimmer Not Included)
Precabled	No

<https://professional.flos.com/en/global/product/constant-current-power-supply-15w-220-240v-50-60hz-with-programmable-output-current-via-dip-switch.-400ma-11.6w-450ma-13w-500ma-14.5w-550ma-15.9w.-phase-cut-dimmable-triac.-60.7661/>

60.7661

