


FLOS

09.7504.14 Black

UT Pro Wall-Washer GA-69

Designed by FLOS Architectural, 2017

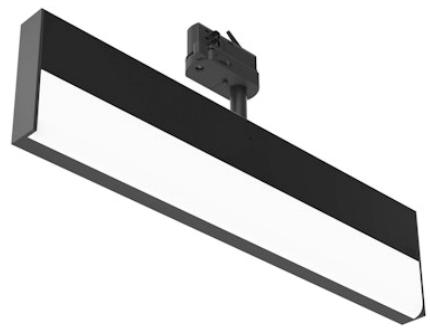


LED - Top LED - 25.2W - 1706lm - 3000K - CRI> 90 - Beam° 36

Wall-Washer lighting module to be installed in standard 3-phase track with LED light source. 220-240V power supply integrated.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	25.2
System power (W)	25.5
Source flux (lm)	3176.6
Lumen Output (lm)	1706

Physical

Colour	Black
Trim	No
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	15
Length (mm)	420
Net weight (kg)	1.05
IP internal	20
IP external	20

Download

Mounting instructions [PDF](#)

Item information [JPG](#)

Photometric Files

LDT / IES [ZIP](#)

Technical Drawings


2D [ZIP](#)

3D [ZIP](#)

Bim [ZIP](#)




Schematic light drawing



Beam Angle: 36°		
h(m)	E(k)	D(m)
1	1199	0.78
2	300	1.56
3	133	2.34
4	75	3.12
5	48	3.90

Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	36
Beam angle C90-270 (°)	75

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Alternating current voltage (Vac)	230
LED current (mA)	700
Power supply	Integrated
Dimmable	No
Power supply type	Non Dimmable
Dimming interface	Not Dimmable
Emergency	No